

The Australian designed and manufactured, **Autoflo Gooseneck-Glow** Mains Power Sensor Tap delivers pre-mixed water for hand washing applications, particularly in the food service, public facilities, hospitality, health and recreation industries and any application where a striking bathroom feature is as important as cross-contamination prevention and water savings.

The contemporary form is complemented with a host of features ensuring consistent performance. The intelligent sensor which self-ranges to its environment, controls maximum flow time, delivers the hygienic self-flush every 24 hours for bacteria control are just some of the features that set the **Autoflo Gooseneck-Glow** Mains Power Sensor Tap apart from other similar products on the market.


## FEATURES

- Infra-red Sensor self-ranging
- Designed for multiple tap installations from one power source
- Illuminated light ring creates unique bathroom ambience
- Simple installation
- Bacteria Preventing Self Flush every 24 hrs
- Dual stage water filters with removable basket to avoid solenoid blockages
- Optional remote control for adjustment from factory settings



**Order Code: 100-0108**

## TYPICAL DIMENSIONS

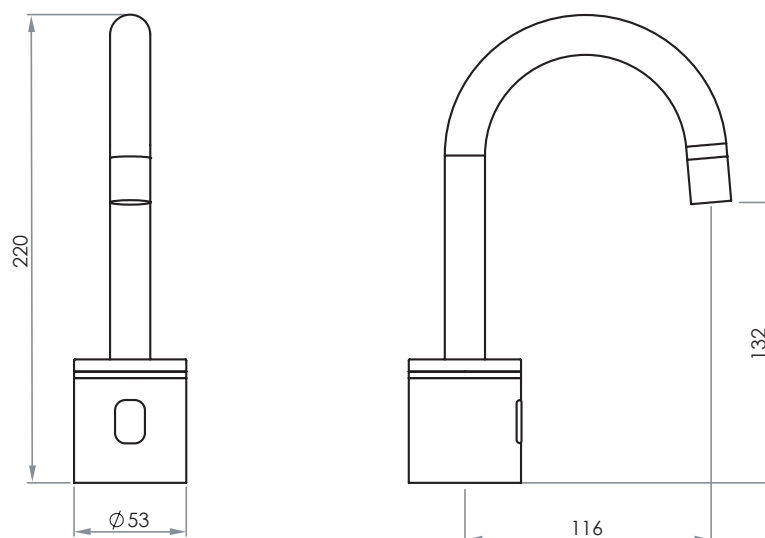


Every effort is made to ensure specifications are correct at the time of printing. Autoflo Pty Ltd reserves the right to make changes without prior notice. All measurements shown are in millimetres.

## TECHNICAL SPECIFICATIONS

- TAP BODY - Solid brass chrome plated
- SENSOR RANGE - 120mm factory set
- OPERATING SUPPLY - 12v DC Power Pack
- OPERATING PRESSURE - 50 to 500kPa
- RUN TIME - Continuous 2 minutes max.
- FLOW RATING - 7 litres per minute
- SOLENOID - Latching/soft closing, brass body
- MAX TEMPERATURE - 50°C



## TYPICAL INSTALLATION

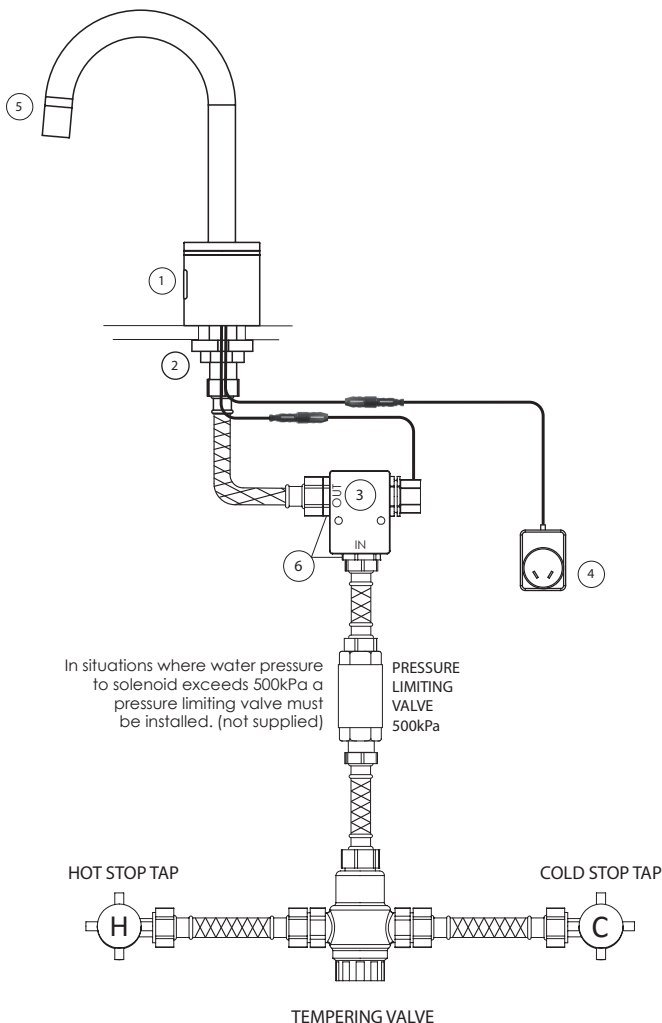

## COMPONENTS SUPPLIED

	Item Code	Description
1	300-5108	Gooseneck Glow sensor body
2	300-3025	Unit mounting kit
3	300-0110	6V Solenoid Valve
4	300-0225	9V Power Pack
5	300-0160	Gooseneck Spout - 120mm
6	600-0133	½" BSP M/M nipple C/P (2)

\*Surface finish variations available on special order  
Conditions Apply

