

The Australian designed and manufactured, **Autoflo Pillar-Std Lead Free** Battery Power Sensor Tap is suitable for a wide range of applications ranging from public commercial areas such as recreation and shopping centres, to private commercial bathrooms, through to hospitals, health facilities, and any application where hygiene and water savings are a priority. The robust construction is complemented with an array of features ensuring consistent performance. The ability to self-range to its environment, the hygienic self-flush performed every 24 hours for bacteria control, the capability for multiple tap installations from one power source are just some of what sets the **Autoflo Pillar-Std Lead Free** Battery Power Sensor Tap apart from other similar models on the market.


## FEATURES

- Operating range self-initialisation
- Accessories available for multiple tap installations from one power source
- Robust design suitable for public and private installations
- Extremely simple installation
- Auto Hygienic Self Flush every 24 hours
- Multiple water flow options available for different applications
- Optional remote control for adjustment from factory settings



Order Code: 100-0105LF

## TYPICAL DIMENSIONS

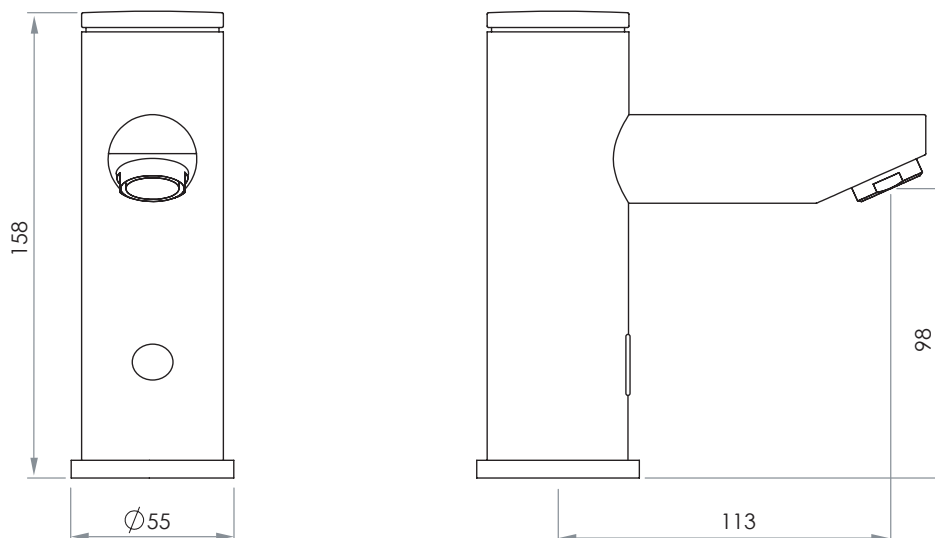


Every effort is made to ensure specifications are correct at the time of printing. Autoflo Pty Ltd reserves the right to make changes without prior notice. All measurements shown are in millimetres.

## TECHNICAL SPECIFICATIONS

- TAP BODY - Solid brass low lead chrome
- SENSOR RANGE - 160mm factory set
- OPERATING SUPPLY - 6v CRP2 Battery
- OPERATING PRESSURE - 50 to 500kPa
- RUN TIME - Continuous 2 minutes max.
- FLOW RATING - 5 star 6L/min
- SOLENOID - Latching/soft closing
- MAX TEMPERATURE - 50°C



## TYPICAL INSTALLATION

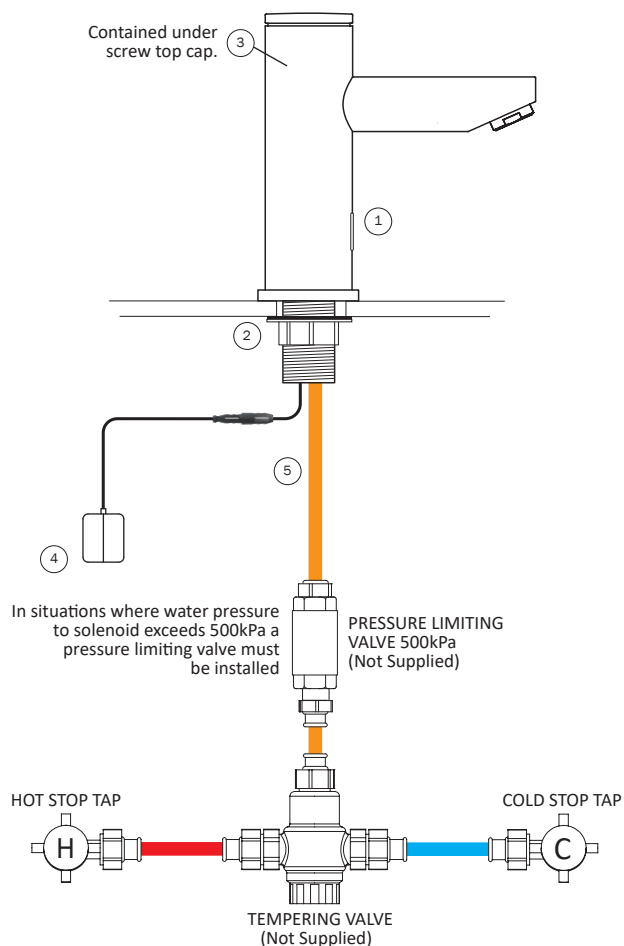

## COMPONENTS SUPPLIED

	Item Code	Description
1	300-5110LL	Pillar body low lead with sensor
2	300-0219	Heavy Duty Nut (with washer)
3	600-0117	6V Solenoid Valve
4	300-0202	6V CRP2 Battery Holder (Battery supplied in box)
5	600-0147LL	M10 to 1/2" BSP flex 500mm (1) Lead Free

\*Mains version available. Order Code: 100-0106LF

\*Surface finish variations available on special order Conditions Apply



Autoflo Pty Ltd  
www.autoflo.com.au