

The Australian designed and manufactured, **Autoflo Pillar-Std** Mains Power Sensor Tap is suitable for a wide range of applications ranging from public commercial areas such as recreation and shopping centres, to private commercial bathrooms, through to hospitals, health facilities, and any application where hygiene and water savings are a priority.

The robust construction is complemented with an array of features ensuring consistent performance. The ability to self-range to its environment, the hygienic self-flush performed every 24 hours for bacteria control, the capability for multiple tap installations from one power source are just some of what sets the **Autoflo Pillar-Std** Mains Power Sensor Tap apart from other similar models on the market.


## FEATURES

- Operating range self-initialisation
- Accessories available for multiple tap installations from one power source
- Robust design suitable for public and private installations
- Battery backup available
- Auto Hygienic Self Flush every 24 hours
- Multiple water flow options available for different applications
- Optional remote control for adjustment from factory settings



**Order Code: 100-0106**

## TYPICAL DIMENSIONS

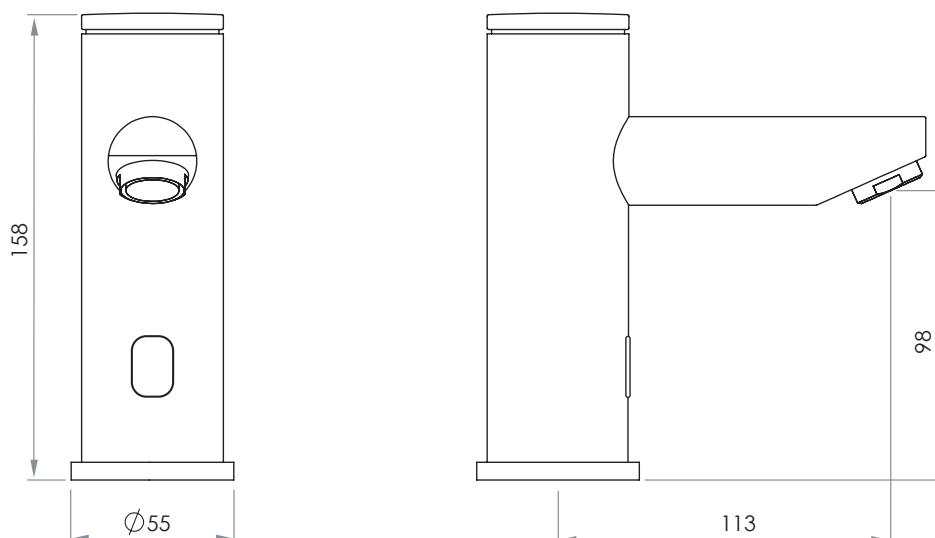

## TECHNICAL SPECIFICATIONS


- TAP BODY - Solid brass chrome plated
- SENSOR RANGE - 160mm factory set
- OPERATING SUPPLY - 12v AC Power Pack
- OPERATING PRESSURE - 50 to 500kPa
- RUN TIME - Continuous 2 minutes max.
- FLOW RATING - 5 Star 6L/min
- SOLENOID - Latching/soft closing
- MAX TEMPERATURE - 50°C



100-0106



## TYPICAL INSTALLATION

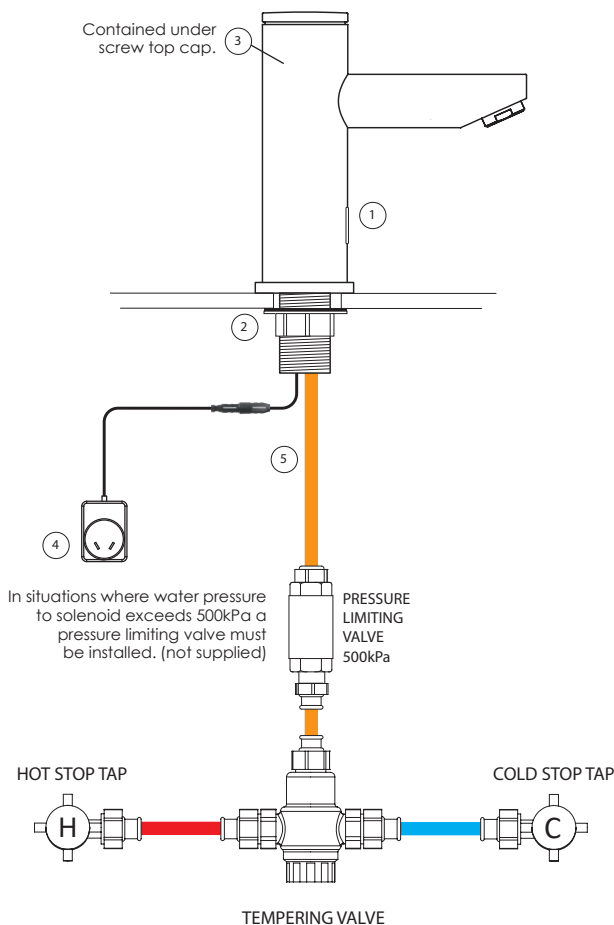

## COMPONENTS SUPPLIED

	Item Code	Description
1	300-5100	Pillar body with sensor
2	300-0219	Heavy Duty Nut (with washer)
3	600-0117	6V Solenoid Valve
4	300-0208	12V Power Pack
5	600-0147	M10 to 1/2" BSP flex 500mm (1)

\*Battery version available. Order Code: 100-0105

\*Surface finish variations available on special order  
Conditions Apply
 Autoflo Pty Ltd  
[www.autoflo.com.au](http://www.autoflo.com.au)