



The Australian designed and assembled, **Autoflo Wall Spout & Soap Dispenser Ensemble - Mains Power** is suitable for a range of hand washing applications, particularly in high-end public commercial areas that experience high traffic and therefore high usage, meaning conservation of water is of paramount importance. The 6-star WELS rating ensures hygienic bathroom environments for users, delivered economically and in an environmentally sensitive fashion. The sensor activation of both soap dispenser and tap outlet means the user has no need to touch fixtures, eliminating any potential cross-contamination.


The robust construction is complemented with an array of features ensuring consistent performance. The ability to self-range to its environment, the smart washing feature, and in particular, longer than usual sensor tap - ensuring outlet is positioned well over the basin, are some of what sets this ensemble apart from anything else on the market.

Elevate your public bathroom areas with the refined Autoflo Wall Spout & Soap Dispenser Ensemble.

## FEATURES

- Operating range self-initialisation
- Direct from the bottle soap dispensing for ease of maintenance.
- Economical water usage through multiple flow controllers.
- Extra long spout suitable for modern basins.
- Dual stage water filters to avoid solenoid blockages.
- Cleaning function with 60 second disable for hassle free maintenance.

## TYPICAL DIMENSIONS

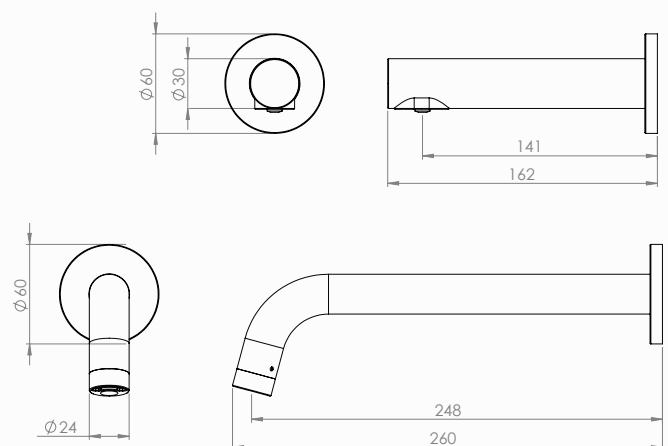

ENGINEERED TO BE BETTER

MAINS POWER - WALL MOUNTED

### WALL SPOUT



#### TECHNICAL SPECIFICATIONS

- TAP BODY - Solid brass - Gunmetal Grey
- OPERATING SUPPLY - 9V Power Supply
- OPERATING PRESSURE - 50 to 500kPa
- RUN TIME - Continuous 2 minutes max.
- FLOW RATING - WELS 6 star
- SOLENOID - Latching/soft closing, brass body
- MAX TEMPERATURE - 50°C


### SOAP DISPENSER



#### TECHNICAL SPECIFICATIONS

- OUTLET BODY - Solid brass - Gunmetal Grey
- OPERATING SUPPLY - 6V Power Supply
- PRIMING FUNCTION - button on control box
- DISPENSE TIME - 1-2 seconds
- SOAP SUPPLY - 1L or 5L bottle
- PUMP TYPE - Peristaltic
- RECOMMENDED VISCOSITY - 2000 MPa

### TYPICAL INSTALLATION

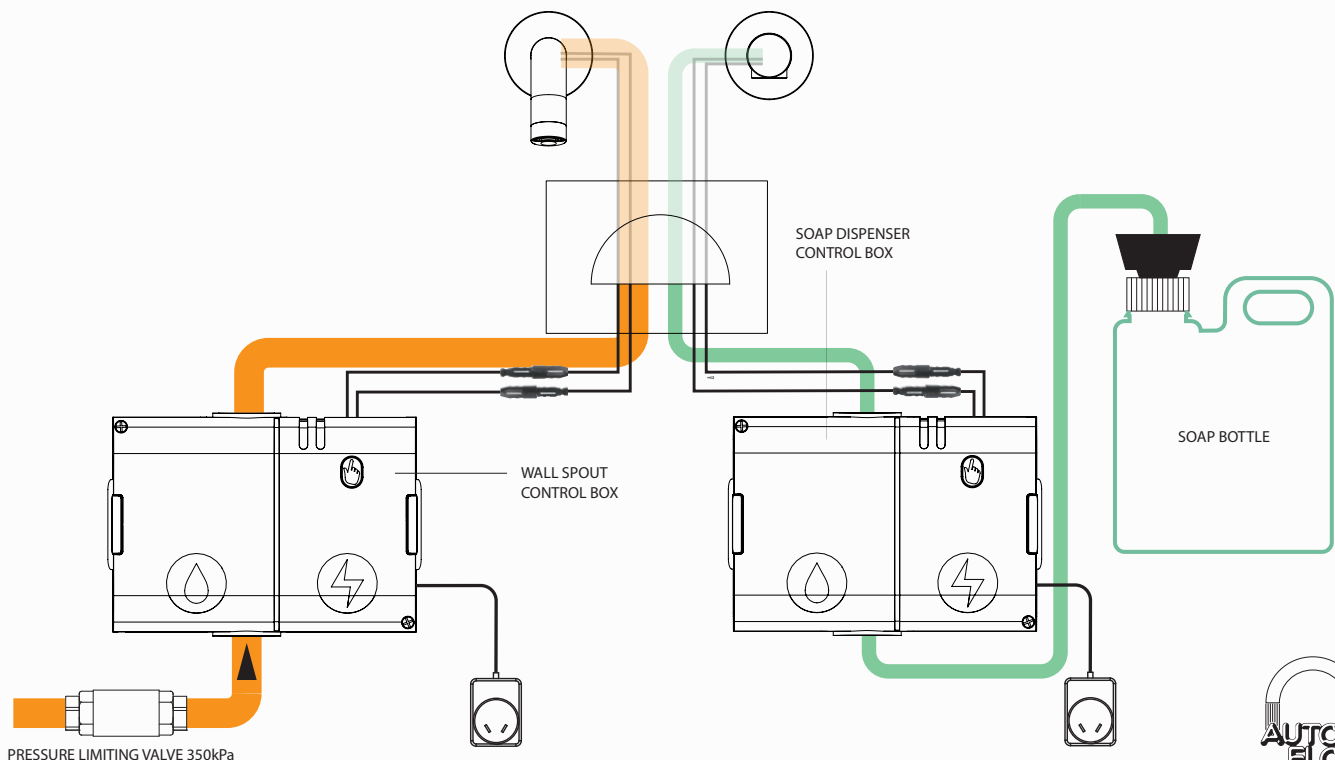

Autoflo Pty Ltd  
www.autoflo.com.au

## DESIGNED AND MANUFACTURED IN AUSTRALIA TO WORLD STANDARD